

Product Sales Sheet

Frictional

Frictional is a 2mm vinyl safety flooring. With an enhanced coefficient of friction, which prevents falls in traffic areas where slipping may occur, Frictional is ideal for rest rooms, locker rooms, and food service areas.



Markets

- Fitness
- Sports
- Student Rec

Applications

- Locker Rooms
- Rest Rooms
- Food Service Areas

Benefits

- Slip-resistant
- Designer look
- Minimal maintenance
- Easy to install



Product Options

Size:

Available as a standard in rolls.
Talk to your local agent to determine availability, pricing, minimums, and lead times.



2mm x 6.56' W (2m) x 65.61LF (20m)
Weld rod required

Color Options:

• See website for colors.



Technical Details

Performance Criteria	Test Standard	Typical Results
Static Load Limit	ASTM F970	Pass
Coefficient of Friction	ASTM D2047	> 0.6
FloorScore	CA 01350	Certified
Reaction to Fire	ASTM E648	Class 1
Abrasion Resistance	EN649	Group T/Type 1



-0.3%


Force Reduction
Absorption of impact energy



78.6%

Energy Restitution
Useful return of impact energy

Values based on Deltec Test

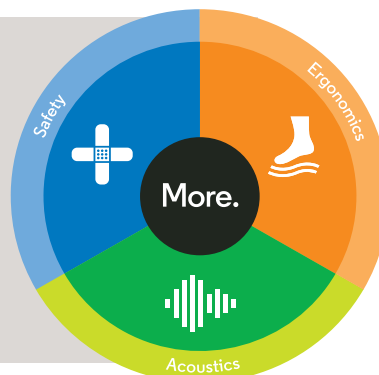

Can a floor
do more?
Yes.