




Boflex Champion

THE ULTIMATE SPORTS FLOOR

- Designed by professionals for professionals
- Exceptional shock absorption for young athletes
- Unique construction impossible to overload
- Low build height

EN14904
Type A4

Build
height 26mm
without top
layer

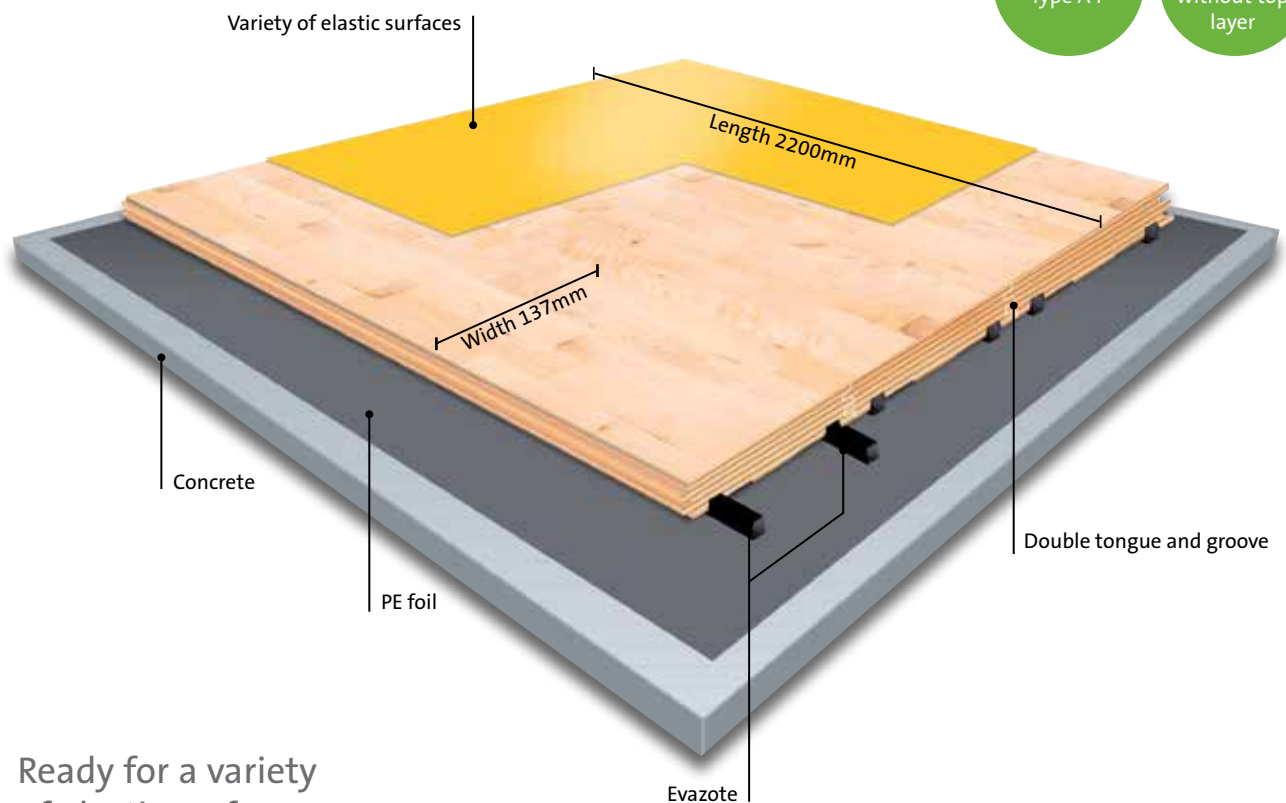

Ready for a variety
of elastic surfaces

The patented Boflex system has a built-in shock absorption material and the construction can withstand an unlimited load.

Boflex Champion is a sub-construction in plywood where a variety of elastic surfaces can be laid on the surface, such as PVC, Linoleum, Polyurethane etc. It has the same properties as Boflex Stadium.

Can be installed on an even and self supporting subfloor or on top of an existing floor.

Area-elastic sports floor

USAGE: Sports and multipurpose centres.


Suitable for installation over underfloor heating systems.

PERFORMANCE ACCORDING TO EN14904	SHOCK ABSORPTION	DEFORMATION	FRICTION	BALL BOUNCE	ROLLING LOAD MIN. 1500N
Boflex					
CHAMPION	Type 4: 58%	Type 4: 2.6mm	-	93%	OK



Boflex Champion


THE ULTIMATE SPORTS FLOOR



Double tongue & groove

Wood species / Grading

Boflex Champion *

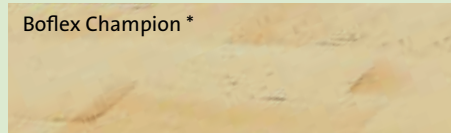

* FSC™ Mix 70%

We reserve the right to deliver up to 10% in lengths from 70cm to 150cm.

Package overview

Pack Size: 6 boards = 1.81m² (25kg)
Pallet Size: 49 packs = 88.69m² (1225kg)

Supplied: Boflex adhesive and perimeter support strips.

Boflex Champion Construction Details (from the top to the edge of concrete/subfloor)

Height

Boflex Champion • Plywood board • 2 strips of Evazote 50 are glued into the board.	Boflex size: 26 x 137 x 2200mm Boflex Champion Board 21mm + Evazote 5mm (Board dimensions: 21 x 137 x 2200mm + Evazote dimensions: 8 x 10mm and 11 x 9mm)	26mm
Perimeter Strips	4.4 x 22 x 1500mm	✓
PE Foil (ordered separately)	Special requirement for new buildings: 2 layers of 0.2mm. It is not a moisture barrier, but gives to the floor an extra protection.	0.4mm
Construction height		26mm

Maintenance

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it. For more information: boensport.com

The environment is at the core of all we do

BOEN hardwood flooring is a product of nature. As a procurer of timber BOEN has an important heritage to maintain. Constant involvement in resource preservation methods, participation in reforestation programmes and the development of alternatives to exotic species shows Boen's dedication towards the environment.

All timber purchased by BOEN is supplied from sources who belong to one or more forestry schemes or are working towards certification.

BOEN Lietuva FSC™ C021510, BOEN Bruk, Norway FSC™ C051117, BOEN UK FSC™ C047288, BOEN Deutschland FSC™ C101713 and BOEN Hardwood Flooring Inc FSC™ C095158 have all been FSC™ certified by the Rainforest Alliance™ to supply FSC™ Mixed 70% and Pure hardwood flooring.



-part of the game!

boensport.com